


555 Double Wire Profiled Fencing Panels

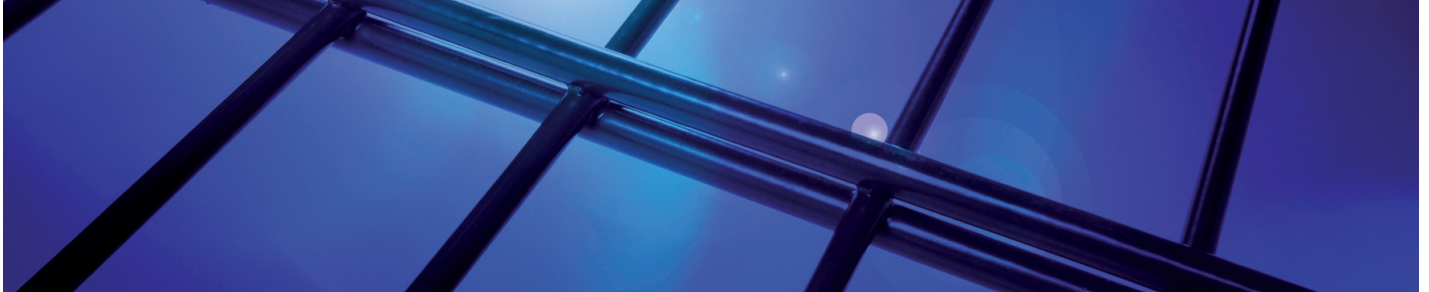



Panel Features

- Profiled "V" beam mesh with double horizontal wires at intervals across the panel for additional rigidity
- Economical panel design
- 3.0m wide panels, reducing installation & post costs by up to 20% when compared to 2.50m wide panels
- Range of heights available from 1200mm to 2400mm
- Produced from 5.00mm* diameter Galvanised wire to BS EN 10244-2:2001 class D

* Nominal wire diameter after Polyester powder coating

Applications

- Schools & Nurseries
- Commercial & Industrial Sites
- Residential Areas
- Ports, Railway Stations and Airports

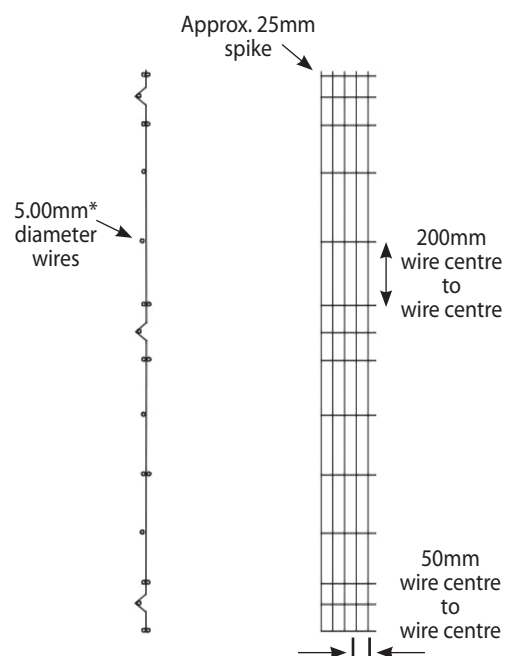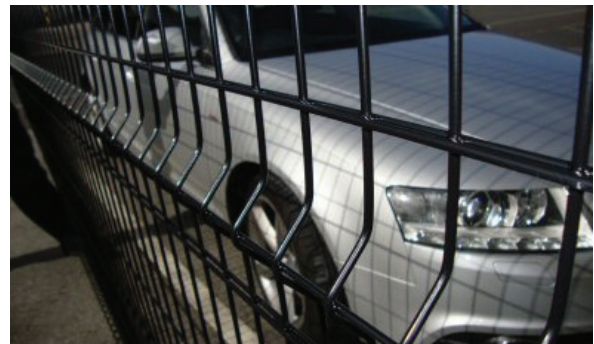



555 Double Wire Profiled Fencing Panels

Panel Specifications

3000mm Wide Panels

Panel Dimensions (h x w) (mm)	Pallet Quantities	Approx Panel Weight (kg)
1200* x 3000	50	17.7
1790 x 3000	50	23.5
1970 x 3000	40	26.0
2370 x 3000	30	31.7

* Supplied without spike top
All wire diameters supplied to S&HP general tolerances

Panel Finishes Available

In addition to the standard Galvanised wire finish (typically 80-100g/m² of Zinc prior to Welding / fabrication) all panels can be offered with triple coat anti-corrosion architectural finish consisting of Galvanised wire + Zinc Phosphate pre-treatment + 100 micron Polyester coating, to give long lasting protection against the elements.



RAL 6005
Moss Green

RAL 9005
Jet Black

RAL 7016
Anthracite
Grey

RAL 9010
Pure White

A wide range of additional colours are available, please contact the Sales Office for further details.

